

# SPC-W1592A

## 15.6inch Industrial Panel PC



### Features

- Aluminum die-casting chassis, fanless design
- Wireless Design
- 15.6 inch LED TFT LCD, capacitive touch
- Intel 10<sup>th</sup> Gen. Core I3/I5/I7 CPU
- 3\*COM, 2\*LAN, 4\*USB3.0
- AT & ATX Model
- Front Panel IP65 Level






SPC-W1592A is an intelligent, fanless panel PC, 15.6" Panel PC equipped with an Intel® 10<sup>th</sup> Gen. Core processor. Meeting the demands of harsh environments, in addition, the dual GbE LAN, 3 x serial ports, 4 x USB ports, make device connection and integration easy.

### Specifications

<b>Processor</b>	CPU	Intel® i3-10110U Dual Core, 2.10-4.10 GHz 4M Cache, TDP 15W Intel® i5-10310U Quad Core, 1.70-4.40 GHz 4M Cache, TDP 15W Intel® i7-10510U Quad Core, 1.80-4.90 GHz 4M Cache, TDP 15W	
	Cooling System	Fanless	
	Memory	1x DDR4 2133Mhz SO-DIMM Sockets, up to 16GB	
	Storage	1*mSATA SSD Full Size	
	I/O ports		4xUSB3.0, Type-A COM: 3xRS232, DB9 Display: 1xHDMI (1920*1200 @30Hz) Audio: 1×Mic-in, 1x Line-out Expansion: MINI-PCIE
		Network(LAN)	2x 10/100/1000Mbps Ethernet
		Input Voltage	12V DC ( 3 Pin Aviation Connector) , optional 9V-36V DC
	<b>LCD Display</b>	Control SW/LED	Power Button, AT & ATX Model
Display Type:		15.6 inch TFT LED Panel( LED Backlight)	
Max. Resolution:		1920x1080 / 4:3	
	Luminance(cd/m <sup>2</sup> )	300nits	
<b>Touchscreen</b>	Touch Type	Capacitive Touch	

<b>OS Support</b>	OS Support	Windows 7/ Windows 8/ Windows 10/ Linux
<b>Environment</b>	Operating Temperature	-0°C ~ 50°C (extend temperature optional)
	Storage Temperature	-10°C ~ 60°C (extend temperature optional)
	Front Panel Protection	IP65 compliant
<b>Mechanical</b>	Dimensions	(W*D*H): 396.5x246x63.5mm Mounting Cut out (W*H): 379.5*229mm
	Weight	6KG (N.W.)
	Color	Black
	Material	Aluminum
	Certification	CE / UL / RoHS

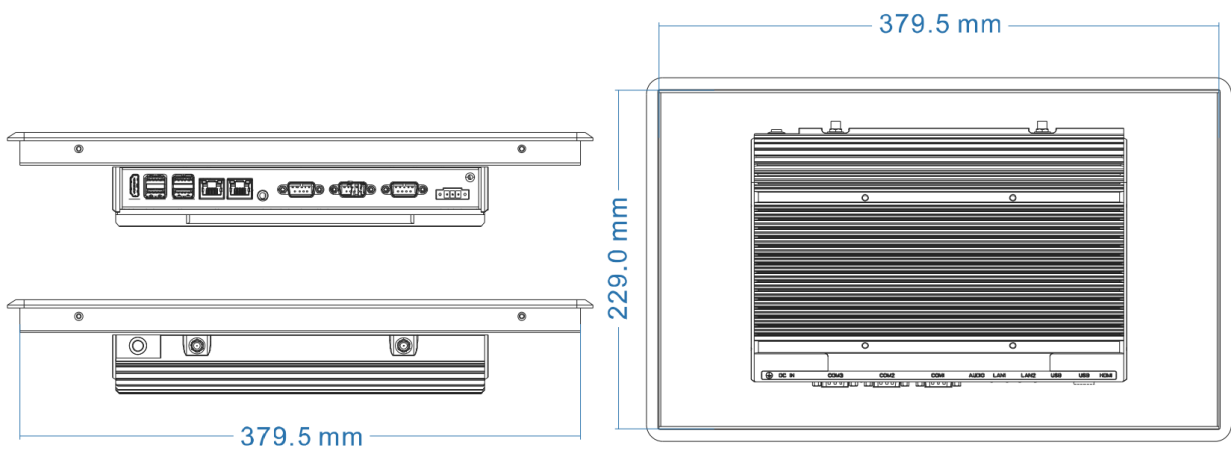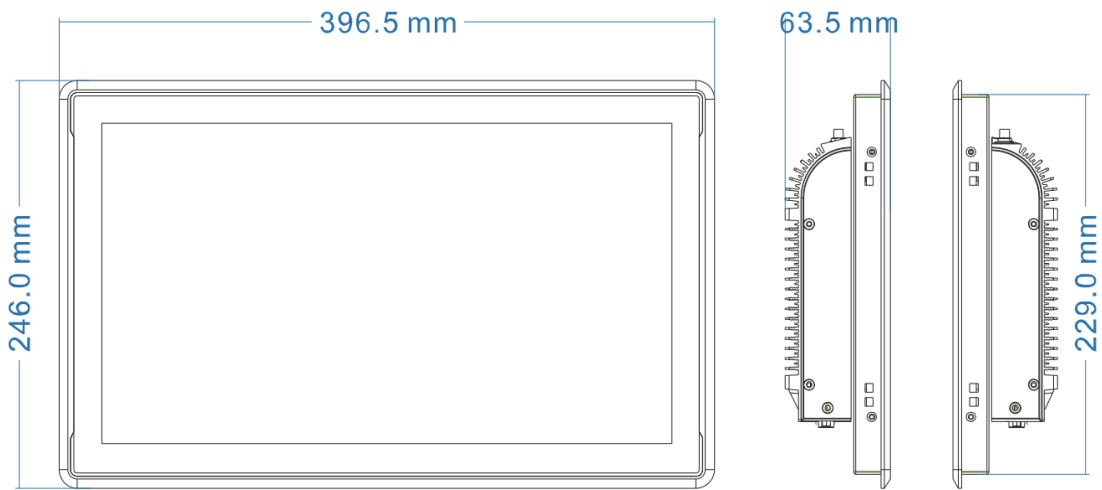

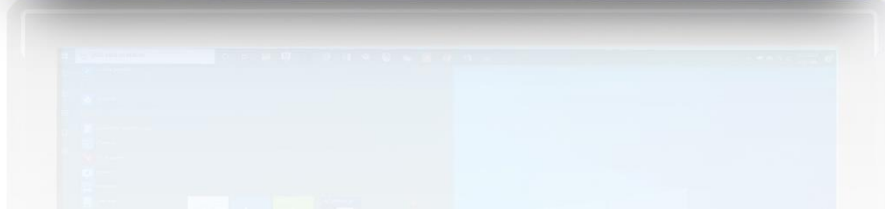



Packing List	Ordering Information
1x SPC-W1592A	SPC-W1592A-1: i3-10110U Version
1x Driver CD	SPC-W1592A-2: i5-10310U Version
1x Power Adapter	SPC-W1592A-3: i7-10710U Version
Optional accessories	Operating Systems
VESA Bracket	WIN8 32bit 64bit EN
Power Cable 2-pin 200cm	WIN10 32bit 64bit EN
	Linux Ubuntu 12.04/16.04/18.04